



SPRAY FLUXER





TAF40-12F

TAF40-15PF - with Pre-heater

Stand-alone
Product memory
Enhanced spray efficiency
Eliminates daily/weekly maintenance
Automatic start-up & automatic shut-down
Fluxing defects on "Lead-free" wave soldering

Special Features

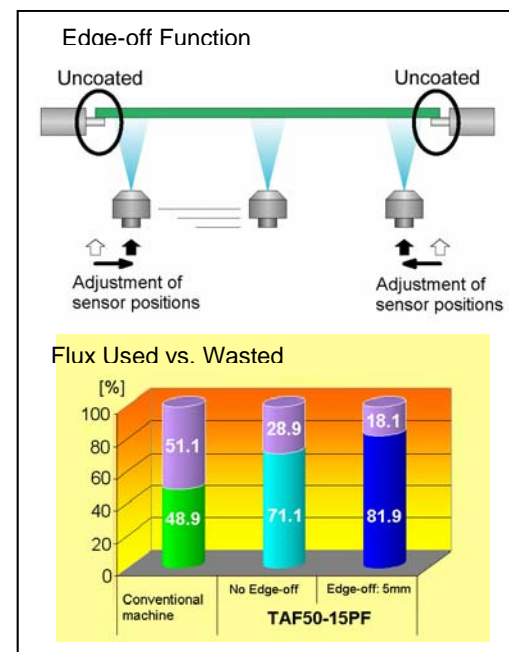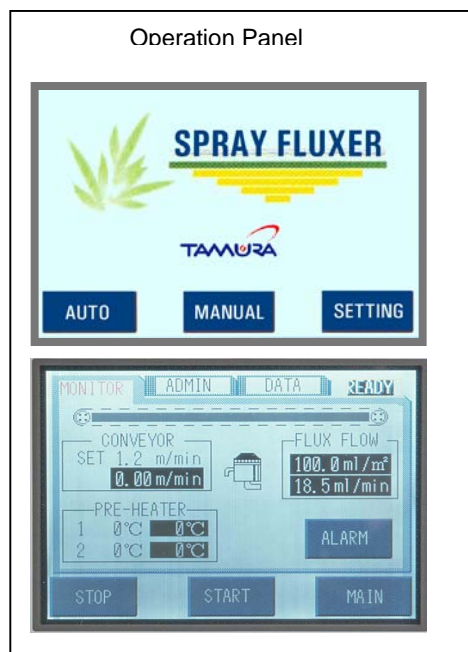

Stand-alone - matches well with any existing wave solder

Minimum flux residue by:

- Minimal spray pressure
- Optimum distance from nozzle to PCB
- Edge-off (Pat. pending) feature

Ease of Operation - Touch panel

Design simplicity

Versatile selection of flux type

Pre-heater for no-clean flux